

# Sequence VIF Engine Test

(ASTM D8226)

## Specifications

- ILSAC GF-6B

## Objective

- Provide a comparative fuel economy index (FEI) of the fuel-saving capabilities of automotive engine oils under repeatable laboratory conditions for low-viscosity (0W-16) or lower oils.

## Field Service Simulated


- Passenger cars and light-duty trucks.

## Test Fixture

- 2012 3.6 L V6 General Motors gasoline engine with external lubricant heating/cooling system and “flying flush” system for changing lubricants without engine shutdown.

## Test Parameters

- The test duration is 196 hours.
- Fuel consumption is measured for six speed/load/temperature test conditions compared to an SAE 20W-30 baseline (BL) lubricant to ensure consistent engine response.
- FEI 1, FEI 2 and FEI Sum (FEI 1 plus FEI 2) are calculated from those comparisons.
- The candidate lubricant is introduced and aged for 16 hours at aging conditions and then fuel consumption is measured for six test conditions for FEI 1.
- The candidate lubricant is left in the engine and aged for 109 hours at aging conditions for FEI 2.
- Fuel consumption for each of the six test conditions for BL after.
- Operating targets are as follows:

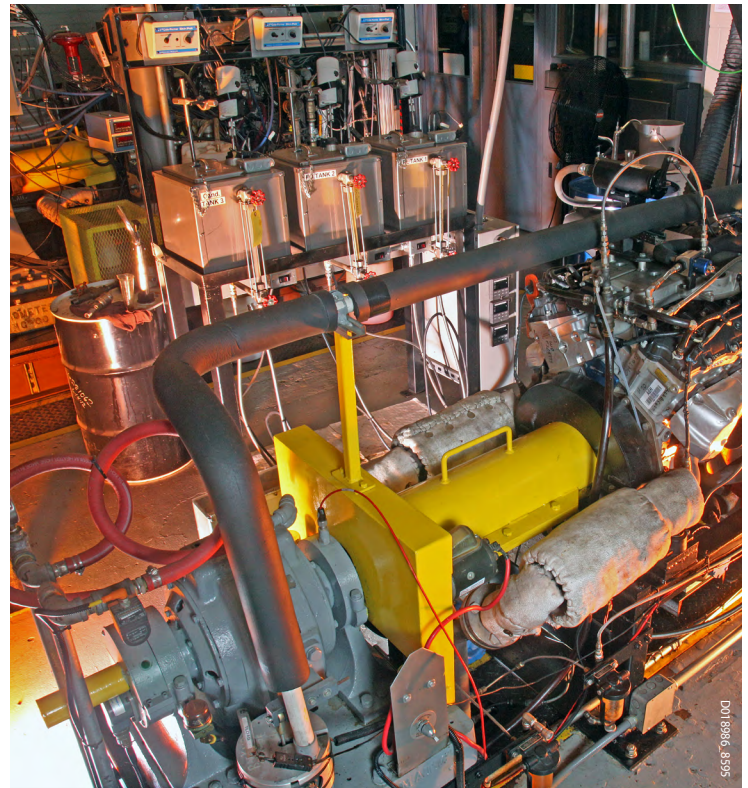

Test Condition	Stage 1	Stage 2	Stage 3	Stage 4	Stage 5	Stage 6
Speed, rpm	2000	2000	1500	695	695	695
Torque, Nm	105	105	105	20	20	40
Lubricant temp, °C	100	65	100	100	35	100
Coolant-in temp, °C	94	65	94	94	35	94

## Test Parts Evaluation

- None.
- Test results are expressed as a percent change of fuel consumed for the candidate lubricant after Aging Phase I (FEI 1) and after Aging Phase II (FEI 2) relative to the baseline lubricant before and after the candidate lubricant.

## Used Lubricant Analysis

Viscosity @ 40°C & 100°C (ASTM D445)

## Pass/Fail Criteria

Fuel Efficiency	Test Limit
SEQUENCE VIF	D8226
0W-16 FEI2	1.9
0W-16 FEI SUM	4.1

We welcome your inquiries.  
For additional information, please contact:

Dan Engstrom  
Research Engineer  
210.522.3472  
[daniel.engstrom@swri.org](mailto:daniel.engstrom@swri.org)

Fuels and Lubricants Research Division

Southwest Research Institute  
6220 Culebra Road • P.O. Drawer 28510  
San Antonio, Texas 78228-0510



[lubricanttesting.swri.org](http://lubricanttesting.swri.org)

Southwest Research Institute is an independent, nonprofit, applied engineering and physical sciences research and development organization using multidisciplinary approaches to problem solving. The Institute occupies 1,200 acres in San Antonio, Texas, and provides more than 2 million square feet of laboratories, test facilities, workshops and offices for nearly 3,000 employees who perform contract work for industry and government clients.



Benefiting government, industry and the public through innovative science and technology

An Equal Employment Opportunity/Affirmative Action Employer • Race/Color/Religion/Sex/Sexual Orientation/Gender Identity/National Origin/Disabled/Veteran • Committed to Diversity in the Workplace

210.522.2122

[ask@swri.org](mailto:ask@swri.org)

Like. Share. Follow. Listen.



[swri.org](http://swri.org)

©2021 Southwest Research Institute.  
All rights reserved.